


[2016-New GreatExam 2016 New Microsoft 70-410 Braindump Free Download (91-110)]

70-410 dumps free share: GreatExam presents the highest quality of 70-410 exam practice test which helps candidates to pass the 70-410 exams in the first attempt. QUESTION 91 You have a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. The disks on Server1 are configured as shown in the exhibit. (Click the Exhibit button.) You create a virtual machine on Server1. You need to ensure that you can configure a pass-through disk for the virtual machine. What should you do?

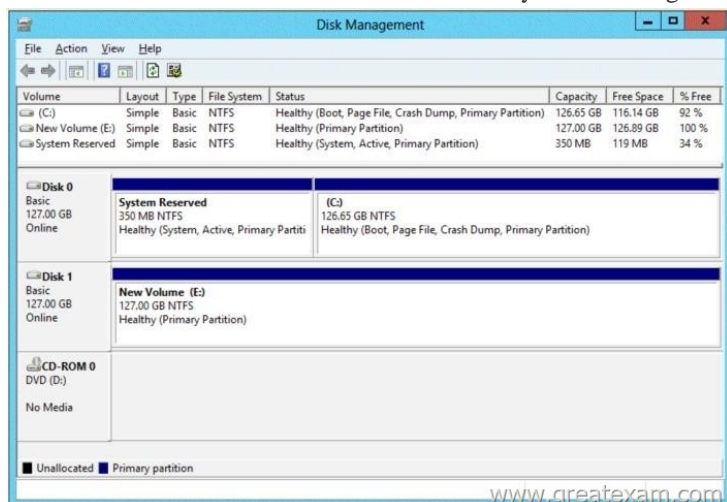


A. Delete partition E. B. Convert Disk 1 to a GPT disk. C. Convert Disk 1 to a dynamic disk. D. Take Disk 1 offline. Answer: D
Explanation: Pass-Through Disk must be offline. Pass-through Disk Configuration Hyper-V allows virtual machines to access storage mapped directly to the Hyper-V server without requiring the volume be configured. The storage can either be a physical disk internal to the Hyper-V server or it can be a Storage Area Network (SAN) Logical Unit (LUN) mapped to the Hyper-V server. To ensure the Guest has exclusive access to the storage, it must be placed in an Offline state from the Hyper-V server perspective.
<http://blogs.technet.com/b/askcore/archive/2008/10/24/configuring-pass-through-disks-in-hyper-v.aspx>

<http://technet.microsoft.com/pt-pt/library/ff404147%28v=ws.10%29.aspx> QUESTION 92 Your network contains an Active Directory domain named contoso.com. The domain contains two servers named Server2 that runs Windows Server 2012 R2. You create a security template named Template 1 by using the Security Templates snap-in. You need to apply template 1 to Server 2. Which tool should you use? A. Security Templates. B. Computer Management. C. Security Configuration and Analysis. D. System Configuration. Answer: C
Explanation: Security templates are inactive until imported into a Group Policy object or the Security Configuration and Analysis.
<http://technet.microsoft.com/en-us/library/jj730960.aspx>

<http://windows.microsoft.com/en-us/windows-vista/using-system-configuration> QUESTION 93 Your network contains an Active Directory domain named contoso.com. The domain contains a domain controller named DCS. DC5 has a Server Core Installation of Windows Server 2012 R2. You need to uninstall Active Directory from DC5 manually. Which tool should you use? A. The ntdsutil.exe command. B. The dcpromo.exe command. C. The Remove-WindowsFeature cmdlet. D. The Remove-ADComputer cmdlet. Answer: A
Explanation: The correct Powershell cmdlet would be Uninstall-AddsDomainController.
https://technet.microsoft.com/en-us/library/jj574104.aspx#BKMK_PS

However, since that is not an option, you are left with ntdsutil. Also, the question states that it must be done manually, and ntdsutil is a very manual tool. QUESTION 94 You have a server named Server 2 that runs Windows Server 2012 R2. Server 2 has the Hyper-V server role installed. The disks on Server2 are configured as shown in the exhibit. (Click the Exhibit button.) You create a virtual machine on Server2 named VM1. You need to ensure that you can configure a pass-through disk for VM1. What should you do?

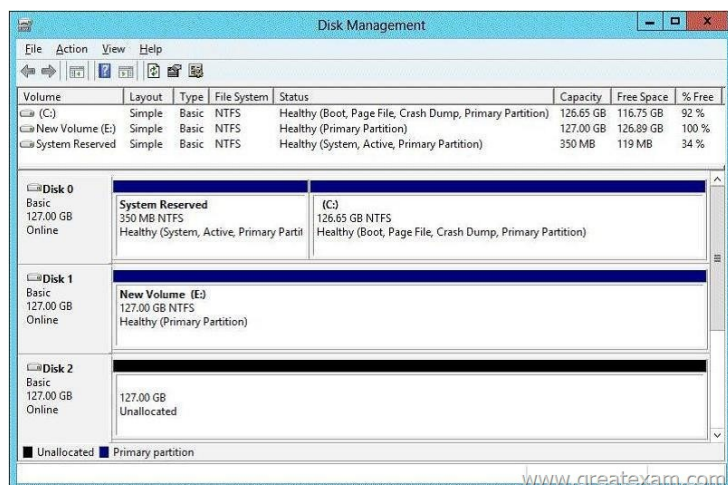

A. Convert Disk 1 to a MBR disk.B. Convert Disk 1 to a basic disk.C. Take Disk 1 offline.D. Create a partition on Disk 1.

Answer: C
Explanation: Pass-through Disk Configuration Hyper-V allows virtual machines to access storage mapped directly to the Hyper-V server without requiring the volume be configured. The storage can either be a physical disk internal to the Hyper-V server or it can be a Storage Area Network (SAN) Logical Unit (LUN) mapped to the Hyper-V server. To ensure the Guest has exclusive access to the storage, it must be placed in an Offline state from the Hyper-V server perspective

<http://blogs.technet.com/b/askcore/archive/2008/10/24/configuring-pass-through-disks-in-hyper-v.aspx> QUESTION 95 You have a file server named Server1 that runs Windows Server 2012 R2. Server1 has following hardware configurations:- 16GB of RAM- A single quad-core CPU- Three network teams that have two network adapters each You add additional CPUs and RAM to Server 1. You repurpose Server1 as a virtualization host. You install the Hyper-V server role on Server1. You need to create four external virtual switches in Hyper-V. Which cmdlet should you run first? A. Set-NetAdapter.B. Add-Net1.bfoTeamNicC. Add-VMNetworkAdapterD. Remove-NetLbfoTeam

Answer: D
Explanation: A. Sets adapter propertiesB. Add new interface to NIC TeamC. Adds vadapter to vmD. Removed NIC from host You need 4 virtual switches but currently only have 3 teams available. You would need to break a team first.

[http://technet.microsoft.com/en-us/library/jj130875\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/jj130875(v=wps.620).aspx)

[http://technet.microsoft.com/en-us/library/jj130850\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/jj130850(v=wps.620).aspx)


[http://technet.microsoft.com/en-us/library/hh848564\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/hh848564(v=wps.620).aspx)

[http://technet.microsoft.com/en-us/library/jj130848\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/jj130848(v=wps.620).aspx) <http://technet.microsoft.com/en-us/library/jj130848.aspx>

QUESTION 96 Your network contains an Active Directory domain named contoso.com. The domain contains two servers named Server1 and Server2 that run Windows Server 2012 R2. You create a security template named Template1 by using the Security Templates snap-in. You need to apply Template1 to Server2. Which tool should you use? A. Authorization ManagerB. Local Security PolicyC. Certificate TemplatesD. System Configuration

Answer: B
Explanation: A security policy is a combination of security settings that affect the security on a computer. You can use your local security policy to edit account policies and local policies on your local computer.

QUESTION 97 Your network contains an Active Directory domain named adatum.com. The domain contains a member server named Server1 and a domain controller named DC2. All servers run Windows Server 2012 R2. On DC2, you open Server Manager and you add Server1 as another server to manage. From Server Manager on DC2, you right-click Server1 as shown in the exhibit. You need to ensure that when you right-click Server1, you see the option to run the DHCP console. What should you do?

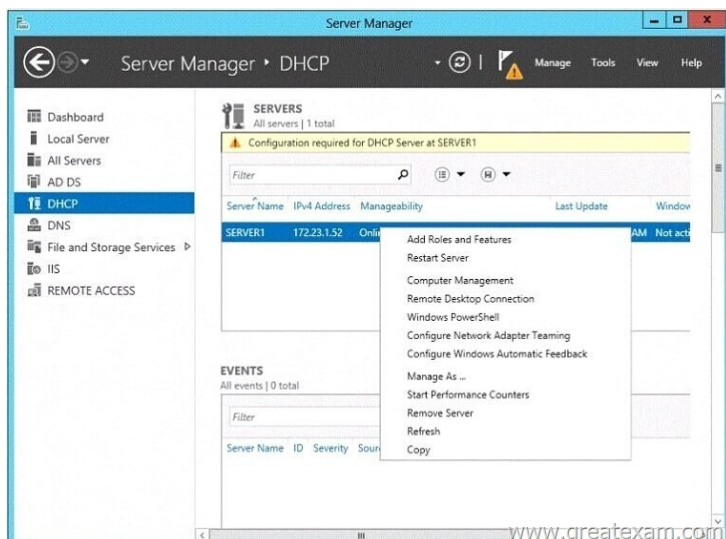


A. On Server1, install the Feature Administration Tools. B. In the domain, add DC1 to the DHCP Administrators group. C. On DC2 and Server1, run winrm quickconfig. D. On DC2, install the Role Administration Tools. Answer: D Explanation: <http://technet.microsoft.com/en-us/library/hh831825.aspx> QUESTION 98 Your network contains an Active Directory domain named contoso.com. The domain contains a server named Server 2012. You create a group Managed Service Account named gservice1. You need to configure a service named Service1 to run as the gservice1 account. How should you configure Service1? A. From a command prompt, run sc.exe and specify the config parameter. B. From Windows PowerShell, run Set-Service and specify the -PassThrough parameter. C. From Windows PowerShell, run Set-Service and specify the -StartupType parameter. D. From Services Console configure the General settings. Answer: A QUESTION 99 Your network contains an Active Directory domain named contoso.com. An organizational unit (OU) named OU1 contains user accounts and computer accounts. A Group Policy object (GPO) named GP1 is linked to the domain. GP1 contains Computer Configuration settings and User Configuration settings. You need to prevent the User Configuration settings in GP1 from being applied to users. The solution must ensure that the Computer Configuration settings in GP1 are applied to all client computers. What should you configure? A. the Group Policy loopback processing mode. B. the Block Inheritance feature. C. the Enforced setting. D. the GPO Status. Answer: A Explanation: A. Group Policy loopback with replace option needs to be used. B. Blocking inheritance prevents Group Policy objects (GPOs) that are linked to higher sites, domains, or organizational units from being automatically inherited by the child-level. C. Enforced prevent blocking at lower level. D. The GPO Status. This indicates whether either the user configuration or computer configuration of the GPO is enabled or disabled. You can use the Group Policy loopback feature to Apply Group Policy Objects (GPOs) that depend only on which computer the user logs on to. User Group Policy loopback processing can be enabled in one of two modes: merge or replace. In merge mode, both GPOs Applying to the user account and GPOs Applying to the computer account are processed when a user logs in. GPOs that Apply to the computer account are processed second and therefore take precedence - if a setting is defined in both the GPO(s) Applying to the user account, and the GPO(s) Applying to the computer account, the setting in the GPO(s) Applying to the computer account will be enforced. With the replace mode, GPOs Applying to the user account are not processed only the GPOs Applying to the computer account are Applied. Loopback can be set to Not Configured, Enabled, or Disabled. In the Enabled state, loopback can be set to Merge or Replace. In either case the user only receives user-related policy settings. Loopback with Replace--In the case of Loopback with Replace, the GPO list for the user is replaced in its entirety by the GPO list that is already obtained for the computer at computer startup (during step 2 in Group Policy processing and precedence). The User Configuration settings from this list are Applied to the user. Loopback with Merge--In the case of Loopback with Merge, the Group Policy object list is a concatenation. The default list of GPOs for the user object is obtained, as normal, but then the list of GPOs for the computer (obtained during computer startup) is appended to this list. Because the computer's GPOs are processed after the user's GPOs, they have precedence if any of the settings conflict. This is a COMPUTER setting, which is found under Computer Configuration | Administrative Templates | System | Group Policy | User Group Policy Loopback Processing Mode. You want to create a new OU in AD that is dedicated to computer accounts that will have loopback processing enabled. Create a new GPO in your new OU to enable User Group Policy Loopback Processing and set the appropriate mode (merge / replace). You will define the user settings you want to Apply to the loopback-enabled PCs via GPOs in this same new OU. You can define these settings either in

the same GPO where you enabled the User Group Policy Loopback Processing setting, or you create another new GPO in the same OU for your user settings. Remember that when using the REPLACE mode, none of your other user GPOs will be Applied when a user logs in to a machine that has loopback processing enabled. ONLY the user settings that are defined in the GPOs that Apply to that machine will be Applied. <http://msmvps.com/blogs/cgross/archive/2009/10/12/group-policy-loopbackprocessing.aspx> [http://technet.microsoft.com/en-us/library/cc782810\(v=ws.10\).aspx](http://technet.microsoft.com/en-us/library/cc782810(v=ws.10).aspx) <http://technet.microsoft.com/en-us/library/cc731076.aspx> <http://technet.microsoft.com/en-us/library/cc753909.aspx> <http://technet.microsoft.com/en-us/library/cc778238%28v=ws.10%29.aspx> <http://technet.microsoft.com/en-us/magazine/dd673616.aspx> QUESTION 100 Your network contains two Hyper-V hosts named Host1 and Host2. Host1 contains a virtual machine named VM1. Host2 contains a virtual machine named VM2. VM1 and VM2 run Windows Server 2012 R2. You install the Network Load Balancing feature on VM1 and VM2. You need to ensure that the virtual machines are configured to support Network Load Balancing (NLB). Which virtual machine settings should you configure on VM1 and VM2? A. Router guard B. DHCP guard C. Port mirroring D. MAC address Answer: D Explanation: In Hyper-V, the VM host prevents dynamic MAC address updates as an extra layer of security in the datacenter. This is because the VM may have full administrator rights, yet it may be untrusted in the datacenter, for example when the VM hosting is provided by an independent hosting company. In this scenario, we need to make sure that one VM cannot cause a DOS or information disclosure attack against another VM. If a VM is able to spoof its MAC address, then it can spoof the MAC addresses of other VMs and impact other VMs on that host. The physical switches have similar protections and it is up to the admin to enable that protection or not. If you do not enable spoofing of MAC address prior to configuring NLB on the VM you could potentially have problems with the NLB cluster. When configuring NLB in unicast mode on Hyper-V with enable spoofing of MAC Address disabled you may see some of the following symptoms: When initially configuring NLB you will lose network connectivity on the network adaptor NLB was configured on. There will be an NLB error event in the Windows Event Log stating that the network adaptor does not support dynamic MAC address updates. After rebooting the server, NLB will appear to be bound to the network adaptor, but the cluster VIP will not have been added to the network adaptor. The cluster MAC address will still be the original MAC address associated with the network adaptor prior to configuring NLB. Use CMD > ipconfig /all to view the MAC address. It should start with "02-BF-***" If you ignore all previous symptoms and manually add the VIP you could get an IP conflict if there are other nodes in the cluster that have the same VIP. With that said, to allow VM guests to run NLB you need to set the VM property for "Enable spoofing of MAC Address". To enable spoofing of MAC Addresses open the Hyper-V management console. Make sure the VM is stopped open the properties of the VM. Select the Network Adaptor for the NLB VM and check the "Enable spoofing of MAC Address" and click OK. Then start the VM. QUESTION 101 Your network contains a Windows Server 2012 R2 image named Server12.wim. Server12.wim contains the images shown in the following table

Index number	Image name
1	Windows Server 2012 Server Core
2	Windows Server 2012 Server Standard
3	Windows Server 2012 Server Datacenter Core
4	Windows Server 2012 Server Datacenter

Server12.wim is located in C:. You need to enable the Windows Server Migration Tools feature in the Windows Server 2012 R2 Server Datacenter image. You want to achieve this goal by using the minimum amount of Administrative effort. Which command should you run first? A. `dism.exe /mount-wim /wimfile:c:Server12.wim /index:4 /mountdir:c:mount` B. `imagex.exe /capture c:c:Server12.wim "windows server 2012 server datacenter"` C. `dism.exe /image: c:Server12.wim /enable-feature /featurename: servermigration` D. `imagex.exe /apply c:Server12.wim 4 c:` Answer: A Explanation: A. Mounts the image before making any changes B. `imagex /capture` creates windows images .wim C. You need to mount the image first D. `imagex /Apply` Applies image to drive The Deployment Image Servicing and Management (DISM) tool is a command-line tool that is used to modify Windows images. You can use DISM to enable or disable Windows features directly from the command prompt, or by Applying an answer file to the image. You can enable or disable Windows features offline on a WIM or VHD file, or online on a running operating system. You can also use the DISM image management command to list the image index numbers or to verify the architecture for the image that you are mounting. ex: `Dism /Mount-Image /ImageFile:C:testimages\install.wim /Name:"Base Windows Image" /MountDir:C:testoffline` By default, DISM is installed at C:\Program Files (x86)\Windows Kits\8.0\Assessment and Deployment Kit\Deployment Tools <http://technet.microsoft.com/en-us/library/hh824822.aspx> <http://technet.microsoft.com/en-us/library/hh825258.aspx> [http://technet.microsoft.com/en-us/library/cc749447\(v=ws.10\).aspx](http://technet.microsoft.com/en-us/library/cc749447(v=ws.10).aspx) [http://technet.microsoft.com/en-us/library/dd744382\(v=ws.10\).aspx](http://technet.microsoft.com/en-us/library/dd744382(v=ws.10).aspx) QUESTION 102 Your network contains an Active Directory domain named contoso.com. The domain contains a server named Server1. Server1 runs Windows Server 2012 R2 and has the

Hyper-V server role installed. On Server1, you create a virtual machine named VM1. When you try to add a RemoteFX 3D Video Adapter to VM1, you discover that the option is unavailable as shown in the following exhibit.

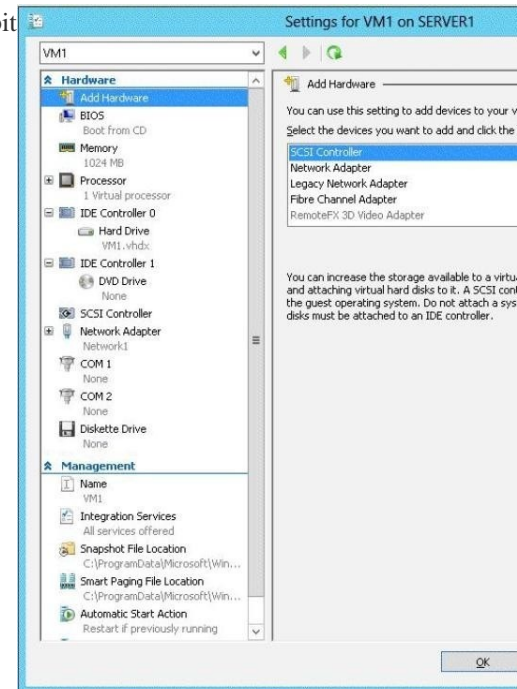

You need to add the RemoteFX 3D Video Adapter to VM1. What should you do first? A. On Server1, run the Enable-VMRemoteFxPhysicalVideoAdapter cmdlet. B. On Server1, install the Media Foundation feature. C. On Server1, run the Add-VMRemoteFx3dVideoAdapter cmdlet. D. On Server1, install the Remote Desktop Virtualization Host (RD Virtualization Host) role service. Answer: D Explanation: A. Enables one or more RemoteFX physical video adapters for use with RemoteFX-enabled virtual machines. B. C. Adds a RemoteFX video adapter in a virtual machine. D. Role must be added for host first. TM is included as part of the Remote Desktop Virtualization Host role service, and it Microsoft? RemoteFX enables the delivery of a full Windows user experience to a range of client devices including rich clients, thin clients, and ultrathin clients. RemoteFX renders content by using graphics processing units (GPUs) that are present on the server and then shared across multiple virtual desktops. RemoteFX renders a range of content including DirectX and all types of multimedia, and it is optimized for LAN-based networks. The number of monitors and their maximum resolution determines the amount of GPU memory on the server required by RemoteFX. This consideration is important in determining the scale for how many virtual machines a Remote Desktop Virtualization Host server can support. [http://technet.microsoft.com/en-us/library/hh848506\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/hh848506(v=wps.620).aspx)

[http://technet.microsoft.com/en-us/library/hh848520\(v=wps.620\).aspx](http://technet.microsoft.com/en-us/library/hh848520(v=wps.620).aspx)

[http://technet.microsoft.com/en-us/library/ff817586\(v=ws.10\).aspx](http://technet.microsoft.com/en-us/library/ff817586(v=ws.10).aspx) QUESTION 103 Your network contains an Active Directory domain named contoso.com. The network contains a domain controller named DC1 that has the DNS Server server role installed. DC1 has a standard primary DNS zone for contoso.com. You need to ensure that only client computers in the contoso.com domain will be able to add their records to the contoso.com zone. What should you do first? A. Modify the Security settings of Dc1 B. Modify the Security settings of the contoso.com zone. C. Store the contoso.com zone in Active Directory D. Sign the contoso.com zone. Answer: C Explanation: C. Only Authenticated users can create records when zone is stored in AD Secure dynamic updates allow an administrator to control what computers update what names and prevent unauthorized computers from overwriting existing names in DNS. If you have an Active Directory infrastructure, you can only use Active Directory - integrated zones on ActiveDirectory domain controllers. If you are using Active Directory - integrated zones, you must decide whether or not to store Active Directory - integrated zones in the Application directory partition. To configure computers to update DNS data more securely, store DNS zones in Active Directory DomainServices (AD DS) and use the secure dynamic update feature. Secure dynamic update restricts DNS zone updates to only those computers that are authenticated and joined to the Active Directory domain where the DNS server is located and to the specific security settings that are defined in the access control lists (ACLs) for the DNS zone. [http://technet.microsoft.com/en-us/library/cc731204\(v=ws.10\).aspx](http://technet.microsoft.com/en-us/library/cc731204(v=ws.10).aspx) <http://technet.microsoft.com/en-us/library/cc755193.aspx> <http://technet.microsoft.com/en-us/library/cc786068%28v=ws.10%29.aspx> QUESTION 104 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines

named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table.

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

You install a network monitoring application on VM2. You need to ensure that all of the traffic sent to VM3 can be captured on VM2. What should you configure? A. NUMA topology B. Resource control C. resource metering D. virtual Machine Chimney E. the VLAN IDF. Processor Compatibility G. the startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization Answer: J Explanation: J. With Hyper-V Virtual Switch port mirroring, you can select the switch ports that are monitored as well as the switch port that receives copies of all the traffic

http://technet.microsoft.com/en-us/library/jj679878.aspx#bkmk_portmirror

QUESTION 105 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table.

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

You plan to schedule a complete backup of Server1 by using Windows Server Backup. You need to ensure that the state of VM1 is saved before the backup starts. What should you configure? A. NUMA topology B. Resource control C. resource metering D. virtual Machine Chimney E. the VLAN IDF. Processor Compatibility G. the startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization Answer: I Explanation: What is the Hyper-V Saved State? Some Hyper-V virtual machines briefly go offline into a "Saved State" at the initial phase of a backup. While the backup is running, they usually come back online after a couple of seconds. Background Knowledge The decision to pull Hyper-V virtual machines offline into a Saved State is done solely within Hyper-VM management Services. Backup software utilities have no way to force a live backup when Hyper-V determines it can't and shouldn't be done. There are many factors that are considered by Hyper-V when it decides whether to take a VM offline or not, Hyper-V Live Backup Requirements: To achieve zero downtime live backups of virtual machines, you need the following conditions met: 1. The VM guest needs to have Integration Services installed, enabled, and running (COM+ System Application Service, Distributed Transaction Coordinator Service, and Volume Shadow Copy Service). Also review the VM settings in Hyper-V, the 'backup' option needs to be checked. 2. All disks involved need to be formatted with NTFS, including the disks within the VM. 3. The Volume Shadow Copy Service and related VSS services need to be enabled and running. 4. The shadow copy storage space for each drive must be available to Hyper-V VSS Writer and be located at the same volume. For instance, the storage space for drive C: needs to be on drive C: itself, and so on. Use the VSSADMIN command from the command line to check the settings. (Use: vssadmin list shadowstorage /vssadmin resize shadowstorage) 5. Ensure the VMs are partitioned using 'basic disk' formatting. At the moment Hyper-V does not support live backup for VMs formatted using dynamic disk partitioning or GPT. 7. Ensure you have at least about 20% free space on each drive involved, such as the drive on the host and the VM's main system drive. 8. Ensure plenty of un-fragmented RAM is available on the host. If a machine is pulled into Saved State, Hyper-V may not be able to bring the VM back online if it can't allocate a continuous block of RAM. Note that there may be sufficient total RAM available but not enough to place a single block. You should therefore aim to keep at least 512 MB to 1 GB of RAM free when all VMs are powered up. [http://msdn.microsoft.com/en-us/library/dd405549\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/dd405549(v=vs.85).aspx) <http://backupchain.com/Understanding-Saved-State-Hyper-V-Backup.html> QUESTION 106 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table.

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

VM3 is used to test applications. You need to prevent VM3 from synchronizing its clock to Server1. What should you configure? A. NUMA topology B. Resource control C. resource metering D. virtual Machine Chimney E. the VLAN ID F. Processor Compatibility G. the startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization

Answer: I

Explanation: By default when you install the Integration Services/Components you get time synchronization with the host OS, here is how to disable ongoing time synchronization. When you install the integration services/components in Hyper-V virtual machine you get a set of services installed and enabled by default. Operating system shutdown Time synchronization Data exchange heartbeat Backup via VSS If you do not want the virtual machine to continuously sync its time to the Hyper-V host using the integration service, you can disable the integration service from the Hyper-V manager. Open up the settings for the VM Under Management, highlight the Integration Services option and you will get a list of the Integration Services installed and enabled Uncheck the Time Synchronization service and press Apply. The virtual machine will now not sync its time with the Hyper-V host on a continuous basis.... BUT it will always sync once at power on. This is required to boot strap the timer inside the virtual machine

<http://www.virtualizationadmin.com/kbase/VirtualizationTips/ServerVirtualization/MicrosoftHyper-VTips/PerformanceandScalability/DisablingTimeSyncinaVM.html>

<http://blogs.technet.com/b/virtualization/archive/2008/08/29/backing-up-hyper-v-virtualmachines.aspx>

QUESTION 107 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

You need to configure VM4 to track the CPU, memory, and network usage. What should you configure? A. NUMA topology B. Resource control C. resource metering D. Virtual Machine Chimney E. the VLAN ID F. Processor Compatibility G. the startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization

Answer: C

Explanation: <http://blogs.technet.com/b/meamcs/archive/2012/05/28/hyper-v-resource-metering-in-windows-server-2012-server-8-beta.aspx>

Metrics collected for each virtual machine using resource metering: Average CPU usage, measured in megahertz over a period of time. Average physical memory usage, measured in megabytes. Minimum memory usage (lowest amount of physical memory). Maximum memory usage (highest amount of physical memory). Maximum amount of disk space allocated to a virtual machine. Total incoming network traffic, measured in megabytes, for a virtual network adapter. Total outgoing network traffic, measured in megabytes, for a virtual network adapter

QUESTION 108 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

You need to ensure that VM1 can use more CPU time than the other virtual machines when the CPUs on Server1 are under a heavy load. What should you configure? A. NUMA topology B. Resource control C. resource metering D. Virtual Machine Chimney E. The VLAN IDF. Processor Compatibility G. The startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization Answer: B Explanation: B. Resource controls provide you with several ways to control the way that Hyper-V allocates resources to virtual machine When you create a virtual machine, you configure the memory and processor to provide the appropriate computing resources for the workload you plan to run on the virtual machine. This workload consists of the guest operating system and all applications and services that will run at the same time on the virtual machine. Resource controls provide you with several ways to control the way that Hyper-V allocates resources to virtual machines. Virtual machine reserve. Of the processor resources available to a virtual machine, specifies the percentage that is reserved for the virtual machine. This setting guarantees that the percentage you specify will be available to the virtual machine. This setting can also affect how many virtual machines you can run at one time. Virtual machine limit. Of the processor resources available to a virtual machine, specifies the maximum percentage that can be used by the virtual machine. This setting applies regardless of whether other virtual machines are running. Relative weight. Specifies how Hyper-V allocates resources to this virtual machine when more than one virtual machine is running and the virtual machines compete for resources. <http://technet.microsoft.com/en-us/library/cc742470.aspx> QUESTION 109 Your network contains a server named Server1 that runs Windows Server 2012 R2. Server1 has the Hyper-V server role installed. Server1 hosts four virtual machines named VM1, VM2, VM3, and VM4. Server1 is configured as shown in the following table

Hardware component	Configuration
Processor	Eight quad-core CPUs that have non-uniform memory access (NUMA)
Memory	32 GB of RAM
Disk	Two local 4-TB disks
Network	Eight network adapters VMQ-supported PCI-SIG-supported

VM2 sends and receives large amounts of data over the network. You need to ensure that the network traffic of VM2 bypasses the virtual switches of the parent partition. What should you configure? A. NUMA topology B. Resource control C. Resource metering D. Virtual Machine Chimney E. The VLAN IDF. Processor Compatibility G. The startup order H. Automatic Start Action I. Integration Services J. Port mirroring K. Single-root I/O virtualization Answer: K Explanation: K. SR-IOV maximizes network throughput while minimizing network latency as well as the CPU overhead required for processing network traffic. <http://technet.microsoft.com/en-us/library/hh831410.aspx> QUESTION 110 Your network contains an Active Directory domain named contoso.com. The network contains a member server named Server1 that runs Windows Server 2012 R2. Server1 has the DNS Server server role installed and has a primary zone for contoso.com. The Active Directory domain contains 500 client computers. There are an additional 20 computers in a workgroup. You discover that every client computer on the network can add its record to the contoso.com zone. You need to ensure that only the client computers in the Active Directory domain can register records in the contoso.com zone. What should you do first? A. Move the contoso.com zone to a domain controller that is configured as a DNS server B. Configure the Dynamic updates settings of the contoso.com zone C. Sign the contoso.com zone by using DNSSEC D. Configure the Security settings of the contoso.com zone. Answer: A Explanation: If you install DNS server on a non-DC, then you are not able to create AD-integrated zones. DNS update security is available only for zones that are integrated into AD DS. When you directory-integrate a zone, access control list (ACL) editing features are available in DNS Manager so that you can add or remove users or groups from the ACL for a specified zone or resource record. <http://technet.microsoft.com/en-us/library/cc771255.aspx> <http://social.technet.microsoft.com/Forums/en-US/winserverNIS/thread/9b041bbc-07654eed-bd1cd65027f05e9f/> <http://blogs.msmvps.com/acefekay/2012/11/19/ad-dynamic-dns-updates-registration-rules-of-engagement/> 1. Active Directory's DNS Domain Name is NOT a single label name ("DOMAIN" vs the minimal requirement of "domain.com." "domain.local," etc). 2. The Primary DNS Suffix MUST match the zone name that is allowing updates. Otherwise the client doesn't know what zone name to register in. You can also have a different Connection Specific Suffix in addition to the Primary DNS Suffix to register into that zone as well. 3. AD/DNS zone MUST be configured to allow dynamic updates, whether Secure or Secure and Non-Secure. For client machines, if a client is not joined to the domain, and the zone is set to Secure, it will not register either. 4. You must ONLY use the DNS servers that host a copy of the AD zone name or have a reference to get to them. Do not use your ISP's, an external DNS

address, your router as a DNS address, or any other DNS that does not have a copy of the AD zone. Internet resolution for your machines will be accomplished by the Root servers (Root Hints), however it's recommended to configure a forwarder for efficient Internet resolution.

5. The domain controller is multihomed (which means it has more than one unteamed, active NIC, more than one IP address, and/or RRAS is installed on the DC).

6. The DNS addresses configured in the client's IP properties must ONLY reference the DNS server(s) hosting the AD zone you want to update in. This means that you must NOT use an external DNS in any machine's IP property in an AD environment. You can't mix them either. That's because of the way the DNS Client side resolver service works. Even if you mix up internal DNS and ISP's DNS addresses, the resolver algorithm can still have trouble asking the correct DNS server. It will ask the first one first. If it doesn't get a response, it removes the first one from the eligible resolvers list and goes to the next in the list. It will not go back to the first one unless you restart the machine, restart the DNS Client service, or set a registry entry to cut the query TTL to 0. The rule is to ONLY use your internal DNS server(s) and configure a forwarder to your ISP's DNS for efficient Internet resolution. This is the reg entry to cut the query to 0 TTL: The DNS Client service does not revert to using the first server ... The Windows 2000 Domain Name System (DNS) Client service (Dnscache) follows a certain algorithm when it decides the order in which to use the DNS servers ... <http://support.microsoft.com/kb/286834> For more info, please read the following on the client side resolver service: DNS, WINS NetBIOS & the Client Side Resolver, Browser Service, Disabling NetBIOS, Direct Hosted SMB (Direct SMB), If One DC is Down Does a Client logon to Another DC, and DNS Forwarders Algorithm if you have multiple forwarders. <http://msmvps.com/blogs/acefekay/archive/2009/11/29/dns-wins-netbios-amp-the-clientside-resolver-browserservice-disabling-netbios-direct-hosted-smb-directsmb-if-one-dc-isdown-does-a-client-logon-to-another-dc-and-dns-forwarders-algorithm.aspx>

7. For DHCP clients, DHCP Option 006 for the clients are set to the same DNS server.

8. If using DHCP, DHCP server must only be referencing the same exact DNS server(s) in its own IP properties in order for it to 'force' (if you set that setting) registration into DNS. Otherwise, how would it know which DNS to send the reg data to?

9. If the AD DNS Domain name is a single label name, such as "EXAMPLE", and not the proper format of "example.com" and/or any child of that format, such as "child1.example.com", then we have a real big problem. DNS will not allow registration into a single label domain name. This is for two reasons:

1. It's not the proper hierarchical format. DNS is hierarchical, but a single label name has no hierarchy. It's just a single name.
2. Registration attempts causes major Internet queries to the Root servers. Why? Because it thinks the single label name, such as "EXAMPLE", is a TLD (Top Level Domain), such as "com", "net", etc. It will now try to find what Root name server out there handles that TLD. In the end it comes back to itself and then attempts to register. Unfortunately it does NOT ask itself first for the mere reason it thinks it's a TLD. (Quoted from Alan Woods, Microsoft, 2004): "Due to this excessive Root query traffic, which ISC found from a study that discovered Microsoft DNS servers are causing excessive traffic because of single label names, Microsoft, being an internet friendly neighbor and wanting to stop this problem for their neighbors, stopped the ability to register into DNS with Windows 2000 SP4, XP SP1, (especially XP, which cause lookup problems too), and Windows 2003. After all, DNS is hierarchical, so therefore why even allow single label DNS domain names?" The above also *especially* Applies to Windows Vista, &, 2008, 2008 R2, and newer.

10. 'Register this connection's address' on the client is not enabled under the NIC's IP properties, DNS tab.

11. Maybe there's a GPO set to force Secure updates and the machine isn't a joined member of the domain.

12. ON 2000, 2003 and XP, the "DHCP client" Service not running. In 2008/Vista and newer, it's the DNS Client Service. This is a requirement for DNS registration and DNS resolution even if the client is not actually using DHCP.

13. You can also configure DHCP to force register clients for you, as well as keep the DNS zone clean of old or duplicate entries. See the link I posted in my previous post. GreatExam is now offering GreatExam 70-410 PDF dumps with 100% passing guarantee. Use GreatExam 70-410 PDF and pass your exam easily. Download Microsoft 70-410 exam dumps and prepare for exam.

<http://www.greatexam.com/70-410-exam-questions.html>